

INDUSTRY



Roblon High-voltage Pulling Rope

Roblon High-voltage Pulling Rope

For pulling high-voltage overhead lines over long spans and distances in environments up to 400 kV
For working live line

Key features

- Non-conductive, even under wet conditions
- Does not corrode
- Torque-balanced
- Lightweight
- Voltage-tested (test report available)

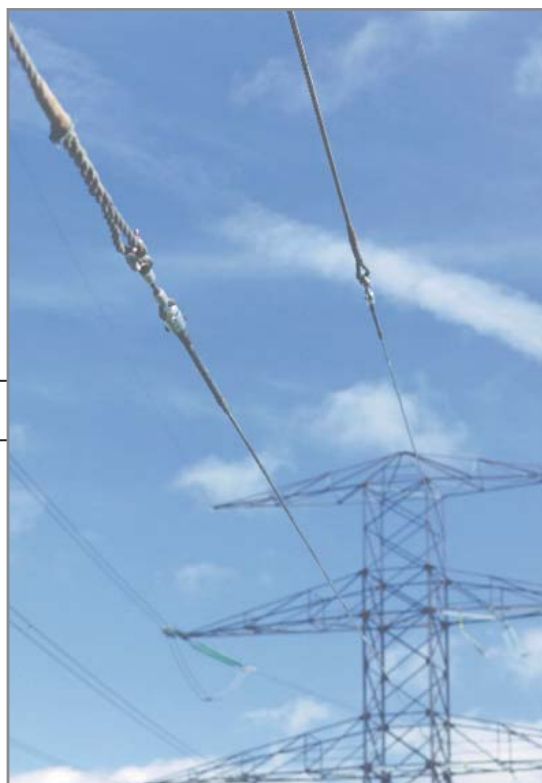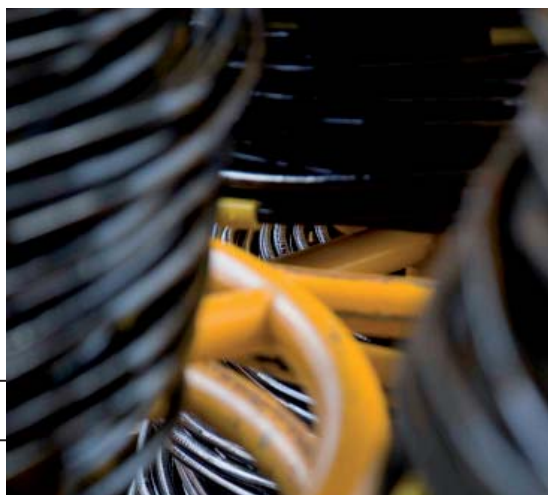

Roblon

PO box 120 • 9900 Frederikshavn • Denmark
Tel: +45 9620 3300 • Fax: +45 9620 3399
info@roblon.com • www.roblon.com



INDUSTRY

Roblon High-voltage Pulling Rope

Diameter (mm)	Breaking strength (kN)	Weight per metre (g)	Metres per K-12 drum (1200 mm flanges)
6.5/9	40	69	6000
8.6/11	60	103	4000
6.9/11	75	122	3500
11/14	100	168	2500

Larger dimensions and breaking strengths can be customized to meet special requirements



One transmission line is ready for stringing, whilst the other is live

