Roblon Aramid Ripcord

Roblon Aramid Ripcord for cutting of corrugated steel tapes and cable jackets.

Roblon Aramid Ripcords can be used in any type of cable, allowing easy access to the cable core during installation or maintenance works. The Roblon aramid ripcord is ideal for cutting through corrugated steel tapes.

Roblon ripcords are also available in water-blocking (WB) versions. They are impregnated with water- blocking solutions which prevent the water from travelling along the ripcord, should water penetrate the cable jacket.

• Excellent cutting properties

- High and uniform cord quality
- Easy to trace
- Available in WB versions
- Available in coloured versions

Roblon Aramid Ripcord











Roblon

The data in this technical data sheet is provided for informational purpose only and does not constitute a specification. The latest update of the datasheet is always available on www.roblon.com

info@roblon.com

Properties	Meter weight	Runnage	Break Strength	Elongation
Unit	g/m	m/kg	Ν	%
1610 dTex				
Nom.	0.18	5556	255	2.5
Min.	0.16	5051	190	2.0
Max.	0.20	6173		3,0
3220 dTex				
Nom.	0.32	3125	515	2.5
Min.	0.30	2083	385	2.0
Max.	0.48	3289		3.0
5040 dTex				
Nom.	0.52	1923	995	2.5

1282

2024

745

2.0

3.0




0.49

0.78

Min.

Max.

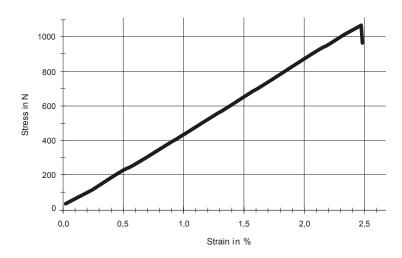



Roblon Aramid Ripcord is ideal for cutting through steel tapes and other metal foils.



The data in this technical data sheet is provided for informational purpose only and does not constitute a specification. The latest update of the datasheet is always available on www.roblon.com

info@roblon.com